




**NORTHCOTT**  
*Cottons that feel like silk*

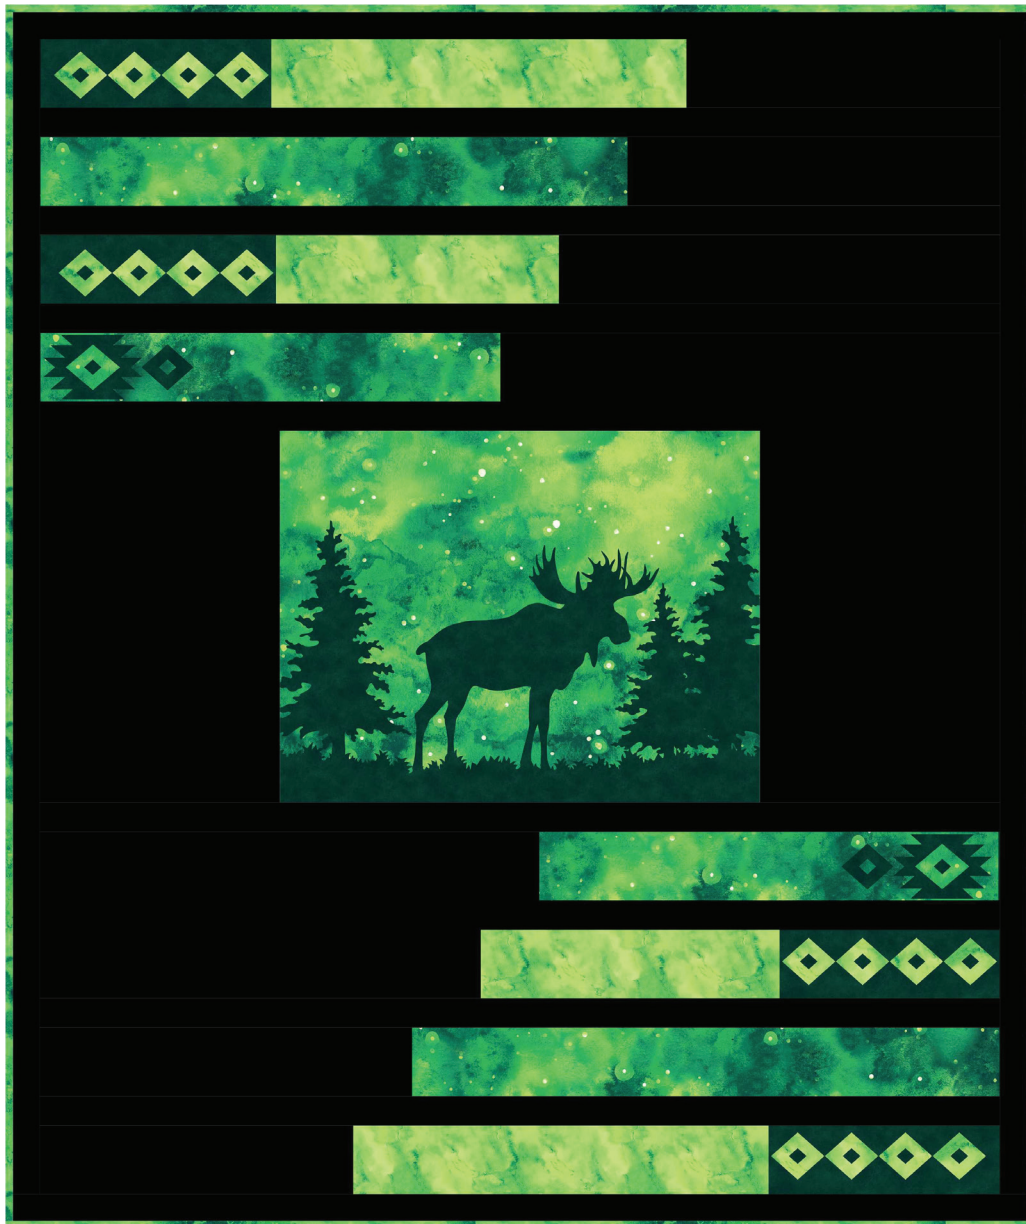

FREE PATTERN • **Majestic Moose lap quilt** • 52½" x 62½"  
by Patti Carey using **Artisan Spirit Imagine** by Northcott

**Northcott Canada**  
101 Courtland Avenue  
Vaughan, Ontario L4K 3T5

**Northcott USA**  
1050 Valley Brook Ave  
Lyndhurst, NJ 07071

[www.northcott.com](http://www.northcott.com)

# Majestic Moose lap quilt

Make a striking lap quilt with just 2 fabrics when you cut apart the moose quilt panel from the *Imagine* collection.

Skill level: Easy

Finished Size: 52½" x 62½"

Cutting Instructions: wof = width of fabric

Note: Yardage and instructions are based on fabric that has NOT been prewashed. If you are using the fabrics listed below, please do not prewash them prior to completing the quilt.

Fabric requirements	Yards	Cutting Instructions
<b>Fabric A - Moose quilt panel</b> #DP22566-76 (36" x 42")	1 panel	• Cut the panel following directions below.
<b>Fabric B - Black solid</b> #9000-99	2 yards	• Cut 1 strip 12¾" x wof; cut into (2) 19½" pieces (step 1). • Cut 16 strips 2" x wof; join end-to-end and cut (2) 59½" pieces (step 10), (2) 52½" pieces (step 11), and (8) 49½" pieces (steps 2, 4, 6 & 8). • Cut 5 strips 4" x wof; trim 2 strips to 26" (step 3). Cut 1 strip into (2) 19½" pieces (step 7). Cut 2 strips into (2) 23" pieces (step 5) & (2) 16½" pieces (step 9).
<b>Fabric C - Charcoal solid</b> #9000-940	½ yard	• Cut 6 strips 2¼" x wof; join end-to-end, press in half and reserve for binding.
Backing	2¼ yards	• Cut one 67" piece. Cut balance in half lengthwise, join end-to-end and add to side of 67" piece.

**General Piecing:** All seams are ¼" unless noted. Press seams toward panel fabric unless noted.

## Cutting the panel:

Note: Press the panel to be as square as possible prior to cutting. Cut along the design lines, adjusting your ruler as required to cut the various width strips.

1. Cut the top and bottom outer rows along inner border edge, stopping prior to side border; trim rows to 4" wide, then trim #9 to 33½" long to include the printed diamonds.
2. Cut the side outer rows along inner border edge; trim rows to 4" wide, then trim #5 to 27" long to include the printed diamonds.
3. Cut the top and bottom rows along inner edge, stopping prior to side border; trim rows to 4" wide, then trim #7 to 30½" long.
4. Cut the side rows along inner edge; trim to 4" wide, then trim to 24" long to include the motif.
5. Trim center panel to 25" wide x 19½" high.



**Piecing:** (Refer to layout diagram)

1. Sew a  $12\frac{3}{4}$ " x  $19\frac{1}{2}$ " Fabric B piece to each side of panel.
2. Sew a  $49\frac{1}{2}$ " x 2" Fabric B piece to top and bottom edges.
3. Sew a 26" x 4" Fabric B piece to non-motif end of each #3 panel piece; sew to top and bottom edges of quilt.
4. Sew a  $49\frac{1}{2}$ " x 2" Fabric B piece to top and bottom edges.
5. Sew a 23" x 4" Fabric B piece to non-motif end of each #5 panel piece; sew to top and bottom edges of quilt.
6. Sew a  $49\frac{1}{2}$ " x 2" Fabric B piece to top and bottom edges.
7. Sew a  $19\frac{1}{2}$ " x 4" Fabric B piece to each #7 piece; sew to top and bottom edges of quilt.
8. Sew a  $49\frac{1}{2}$ " x 2" Fabric B piece to top and bottom edges.
9. Sew a  $16\frac{1}{2}$ " x 4" Fabric B piece to non-motif end of each #9 panel piece; sew to top and bottom edges of quilt.
10. Sew a  $59\frac{1}{2}$ " x 2" Fabric B piece to each side of quilt.
11. Sew a  $52\frac{1}{2}$ " x 2" Fabric B piece to top and bottom of quilt.



**Finishing:**

Layer the prepared backing, a 58" x 68" piece of batting and the quilt top. Baste and quilt as desired. Trim edges even with quilt top. Sew the prepared binding to the edges with a  $\frac{1}{4}$ " seam, turn and stitch in place. Enjoy your new quilt!